



Derivatori separati per strumenti in c.c.
Separate SHUNT for DC instruments

Serie DF
DF series



PRECISIONE
ACCURACY
TEMPERATURA
TEMPERATURE


$\pm 0.5\%$
 $\pm 0.5\%$
campo di impiego -25 +40°C
operating temperature -25 +40°C

Caduta di tensione <i>Voltage drop</i>	Portate <i>Ranges</i>	Dimensioni <i>Dimensions</i>				
		A mm	B mm	C mm	D mm	E mm
mV	A					
60 mV	Da 5 a 30 A	84	104	50	25	0.5
	Da 40 a 70 A	84	104	50	25	1
	Da 75 a 150 A	84	104	50	35	1.5
100 mV	Da 5 a 30 A	116	136	82	25	0.5
	Da 40 a 70 A	116	136	82	25	1
	Da 75 a 150 A	116	136	82	35	1.5

A RICHIESTA / ON REQUEST

- Altre portate / *Other ranges*
- Cordini doppi tarati: 1.5m – 2.5 mm² – 0.02 Ω
Two calibrated leads : 1.5m – 2.5 mm² – 0.02 W

DIMENSIONI D'INGOMBRO
OUTLINE DIMENSIONS

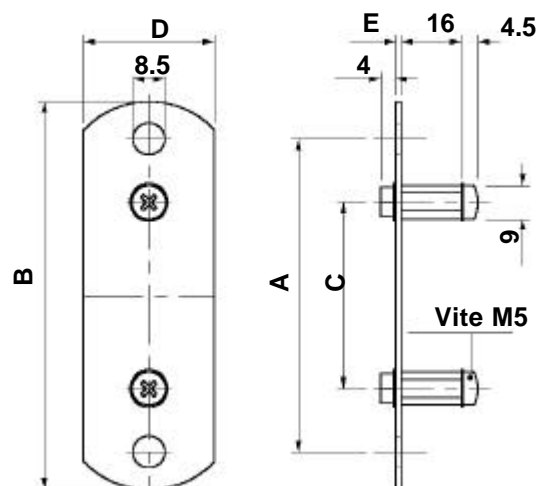

Modello depositato®
Registered Trade mark

COME ORDINARE / HOW TO ORDER

MODELLO / *MODEL* _____
 PORTATA / *RANGES* : _____
 C.D.T. / *VOLTAGE DROP* _____

